

NHR1 & NCR2 Preset programming



For manually programming the NHR1 handset, you can store up to 255 channels and customize each by name, each channel can be programmed by the following instruction:

Setting Channels

- Set the radio in VFO mode in the settings (Menu/Set/Others/Disp Mode/VFO)
- Input the frequency using the keypad
- Press and hold the MR/EDIT button
- Enter the channel number you wish to save on using the keypad
- Press the Menu/OK button to save


If there is a (*) star next to the channel number, then it has already been used/programmed.

Naming Channels

- Set the radio to CH Mode in the settings (Menu/Set/Others/Disp Mode/CH No)
- Press and hold the MR/EDIT button
- Press DEL to clear and use the keypad to input label
- Press the Menu/OK button to save

When using keypad, press the # to change input mode (lower case, upper case, or symbol).

20 characters MAX per label.

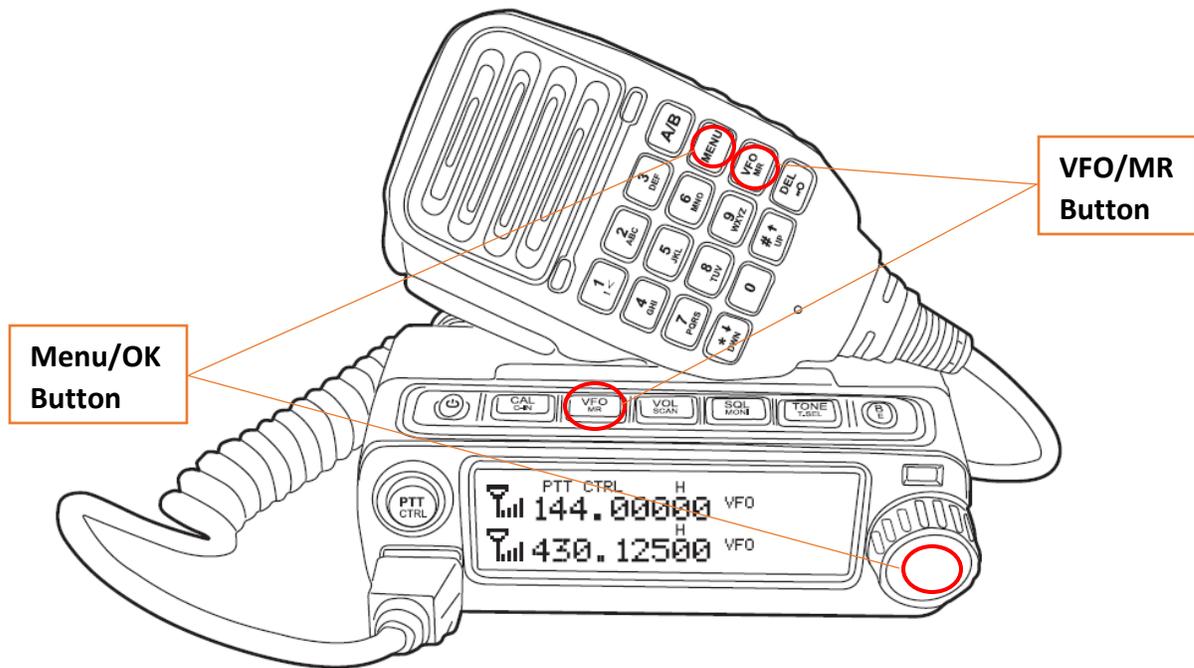

For manually programming the NCR2 radio, you can store up to 255 channels and customize each by name, each channel can be programmed by the following instruction:

Setting Channels

- Set the radio in VFO mode by pressing the VFO/MR button to scroll between functions
- Input the frequency using the keypad
- Press and hold the VFO/MR button
- Select the channel number you wish to save on using the Dial knob
- Press the Menu/OK button to save

If there is a (*) star next to the channel number, then it has already been used/programmed.

Naming Channels

- Set the radio in CH mode by pressing the VFO/MR button to scroll between functions
- Press and hold the MR/EDIT button
- Press DEL to clear and use the keypad to input label
- Press the Menu/OK button to save

When using keypad, press the # to change input mode (lower case, upper case, or symbol).

20 characters MAX per label.